

# Measurement requirements to maximise recovery phase dose reduction in large contaminated land areas

Kasper G. Andersson

DTU - Technical University of Denmark

Center for Nuclear Technologies

DK-4000 Roskilde, Denmark


# Recovery countermeasures:

Experience from numerous field investigations after Chernobyl  
in the Former Soviet Union and e.g. Gävle, Sweden (ca. 1986-2000)



# Four 'generations' of data sheets



<p>RISØ</p> <p><b>Practical Methods for Decontamination 9 Years after Chernobyl</b></p> <p>Editors J. Roed, K.G. Andersson</p> <p>Risø National Laboratory December 1995</p>	<p>nks Nordisk kerne- sikkerheds- forskning</p> <p>EKOS</p> <p>EVALUATION OF ACCIDENT CLEAN-UP RESILIENCE</p> <p>Kas Risø N Ro</p>	<p>RISØ</p> <p><b>Physical Conditions for Acceptable Living Conditions in Contaminated Areas</b></p> <p>K.G. Andersson, J. R. Meckbach, D.H. N.A. Beresford and others</p> <p>Risø National Laboratory January 2003</p>	<p>Radiation Protection Division</p>  <p>RPD-EA-5-2005</p> <p>Countermeasures for the Management of Inhabited Areas Contaminated After a Radiological Incident</p> <p>EURANOS(CAT1)-TN(05)-04</p> <p>J Brown, KG Andersson and KT Mortimer</p> <p>Restricted – Commercial</p> <p>Contract Report</p>
--	--	---	---




# The EURANOS countermeasure datasheets (CEC FP6)



ID: 30 <span style="float: right;">- Roads and paved areas -</span>	
Vacuum sweeping	
Objective	To reduce external gamma and beta doses from contamination on roads, paved and other outdoor areas with 'hard' surfaces within inhabited areas, and reduce inhalation doses from material resuspended from these surfaces.
Other benefits	Will remove contamination from roads, paved and other outdoor areas with 'hard' surfaces.
Countermeasure description	<p>Municipal vacuum sweepers can be used to clean paved areas. Different types of vacuum sweeper are used for large surface areas, such as roads, and for small surface areas, such as pavements. It is recommended that machines with the ability to dampen the surface with water sprays are used to reduce dust and hence the resuspension hazard. Some road sweepers can operate in wet weather conditions.</p> <p>The aqueous waste can be disposed to drains either directly or can be collected. Segregation of the contaminated dust from the water may be possible.</p> <p>Dust creation during implementation is unlikely to be a problem and so methods are not required to reduce the resuspension hazard to workers.</p> <p><i>Recontamination of surface by resuspended contaminants will be insignificant, so repeated action is not called for.</i></p>
Target surface or population	Paved surfaces (roads, pavements, paths, yards, playgrounds etc.)
Target radionuclides	All radionuclides. Suitable for removing short-lived radionuclides if implemented quickly. See <a href="#">Part III, Section 3</a> for information on radionuclides.
Scale of application	Any size. Suitable for small surface areas (e.g. pavements, playgrounds) and large surface areas (e.g. roads). Unlikely to be used around peoples' houses.
Timing of implementation	Maximum benefit if carried within 1 week of deposition as option relies on removing dust from surface.
<b>Constraints on implementation</b>	

- Focus in countermeasure descriptions and associated handbook material was always on support in *making decisions on which countermeasures to implement*.
- Lack of information on how to *optimise the practical work* once the decisions had been made on which countermeasures to implement.
- Information was given on technical limitations, potential pitfalls to be avoided, etc., but explicit strategic descriptions of what should be done in practice to guide and optimise implementation of selected countermeasures were not given.

Individual plot diagram with dimensions and dose rate - mKR/h before and after (in parenthesis) decontamination

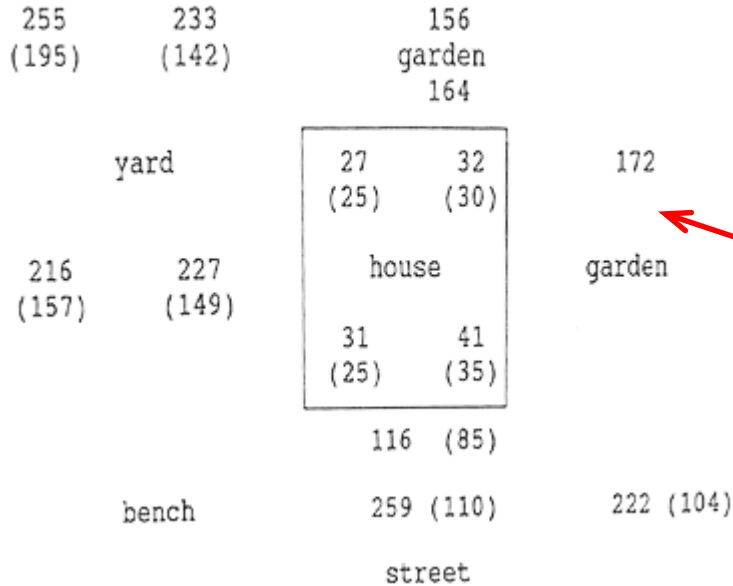


Russian army decontaminated 93 settlements in Bryansk Region in 1989: DRF = 1.1 – 1.5.

Main countermeasure: Removal of topsoil layer

Example of sketch from Anisimova et al. (1994) on the 1989 results.

Removal depth was very inhomogeneous even over small areas and not optimised in relation to measurements of vertical distribution of contaminants.

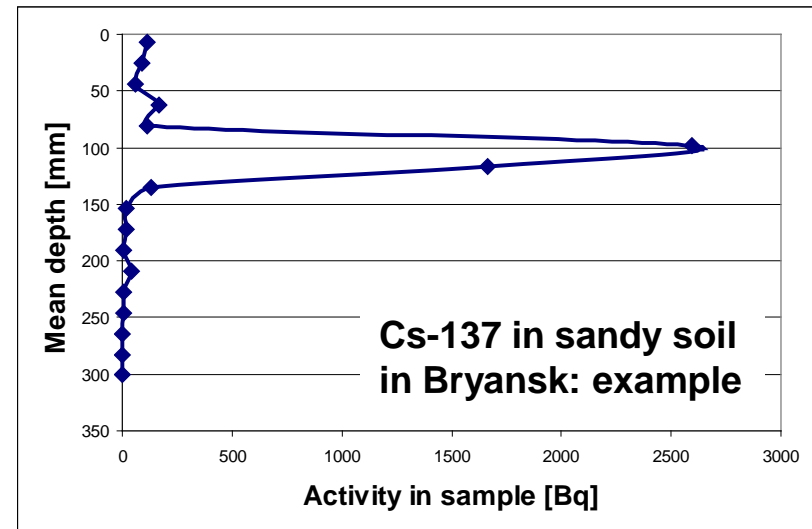



Danish-Russian field  
campaign 1997: DRF of 3-6

Practical optimisation through simple  
measures. E.g., vertical soil core  
sampling, in situ sectioning and rapid  
measurement on portable gamma monitor  
(NaI-based)



In situ measurement and  
sampling strategy defined in  
advance, and care taken to  
decontaminate according to  
measurement results. E.g.,  
'dripzones' near houses  
examined separately. Only the  
necessary soil layer was  
removed, thus minimising waste.

FUKUSHIMA: Surprisingly moderate countermeasure effect often recorded. Very large amounts of soil waste generated, some of which with very low contamination level.



Topsoil stripping (mechanical digger)




Manual topsoil stripping





## FUKUSHIMA: Decontamination effectiveness for contamination removal from asphalt road surfaces.

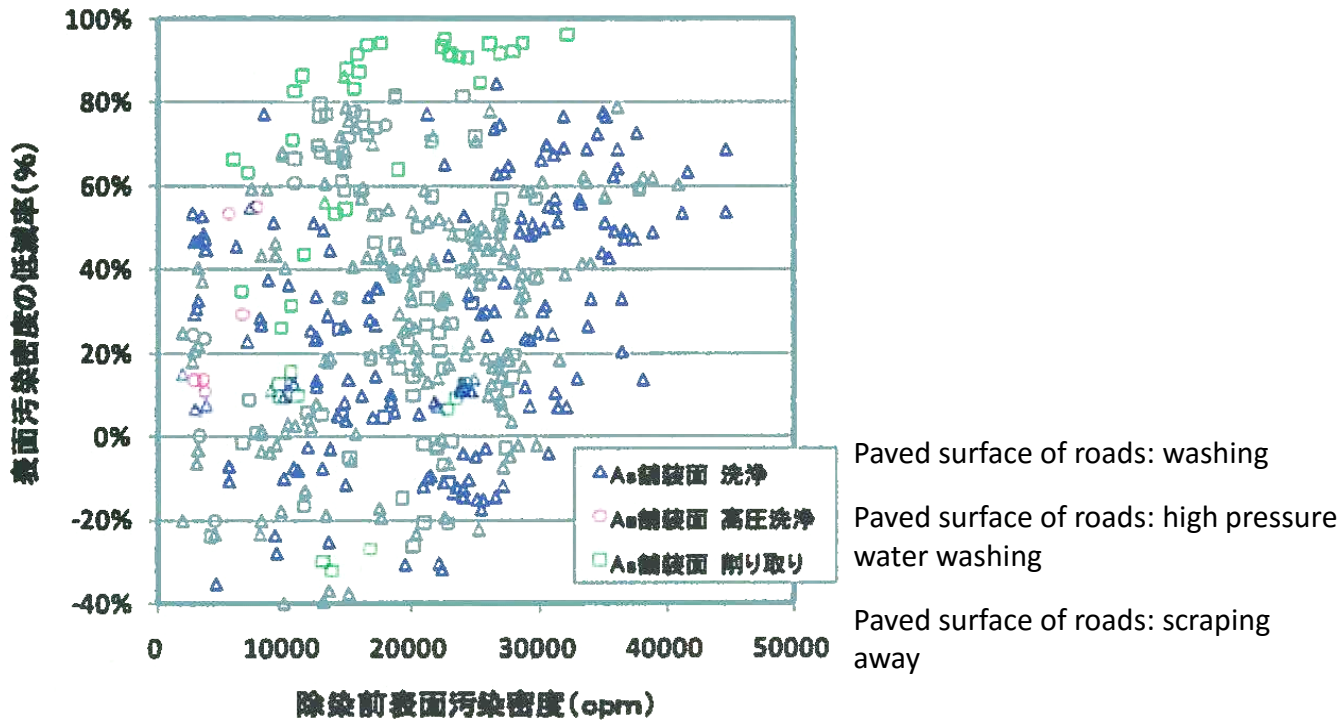

- Need for measurement strategy to support practical intervention.
- Need to concretise the objective of measuring (changes with time).
- Thousands of soil samples taken in Fukushima 30 km zone. Purpose of sampling described in paper submitted to JER as ‘to evaluate Fukushima Dai-ichi derived radionuclides’.
- Soil sampling depth of 5 cm based on a single garden soil assessment.
- Measurements need to be purpose-driven, e.g. soil sampling could be done to:
  - to draw a 2-dimensional map of topsoil contamination as rough indicator of area contamination level (dose rate might be more useful).
  - to assess model parameters to more exactly estimate future doses (e.g., local vertical contaminant distribution, soil characteristics, contaminant physico-chemical characteristics / morphology / environmental solubility: consider e.g. amounts needed for the specific analysis)
  - to guide countermeasure implementation (samples taken in specific locations/positions). Strategy for the implementation process.

## **Examples of available international guides for monitoring and sampling**

ICRP 43 (1985). Principles of monitoring for the radiation protection of the population: Old, short, superficial, not purpose-oriented.

IAEA TECDOC 1092 (1999). Generic procedures for monitoring in a nuclear or radiological emergency: only considers radiation monitoring, not purpose-oriented.

ICRU 76 (2006). Sampling of radionuclides in the environment. Broad scope limits value, valuable in suggesting statistically based sampling approaches, not purpose-oriented.

## **Conclusions**

There is a generic need to describe exact purpose-driven sampling and measurement requirements /strategies (e.g., to guide optimised intervention).

Close links between samplers, analysts, planners and intervention workers needed.

Much effort is needed to transfer method-specific knowledge, making it operational.